

AlphaTec®

66-300

PVC, Red, 390 g/m²

Formerly known as TRELLCHEM® SPLASH 600

Basic splash protective coverall for protection against chemical spray in low-risk environments.

- A versatile everyday workwear
- Available in 5 different designs
- Made from a strong and flexible fabric, ensuring wearer comfort
- Suit material is antistatic
- Provides good protection against alkalis and acids
- Offers protection against infective agents
- Certified to EN 14605:2005, type 4 (spray-tight)



Drawstring hood with chin flap (all suit models)



Double splash guard/flap with press studs (all suit models)



Open sleeves with hook-and-loop closure (2 designs), alternatively Bayonet glove ring system (3 designs)



Open legs (2 suit models) or attached PVC safety boots (3 suit models)




Splash Protection



Applications

- Chemical Handling
- Emergency Teams
- Fire & Rescue Service
- First Response
- Hazmat Teams
- Industrial and Tank Cleaning
- Petrochemicals

Material Construction

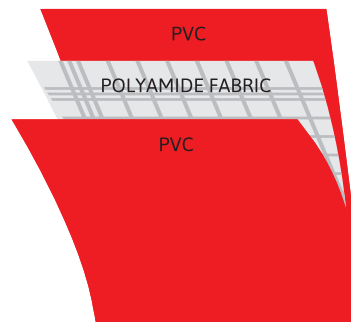

AlphaTec®

66-300

PVC, Red, 390 g/m²

PRODUCT INFORMATION

AlphaTec® 66-300, PVC 390 g/m ² - Model Description			
	Material	Model	Design features
AlphaTec®	66-300	111	Open legs, open sleeves with hook-and-loop closure
		111-G09	Open legs, Bayonet rings + AlphaTec® #08-354 gloves (Scorpio)
		122	Attached boots, open sleeves with hook-and-loop closure
		122-G09	Attached boots, Bayonet rings + AlphaTec® #08-354 gloves (Scorpio)
		122W-G09	Attached boots, watertight PVC zipper, Bayonet rings + AlphaTec® #08-354 gloves (Scorpio)

AlphaTec® 66-300, PVC 390 g/m ²	
Design	Coverall with drawstring hood.
Garment material	Polyamide fabric, coated with PVC on both sides, 390 g/m ² . PVC is suitable for protection against alkaline chemicals in all concentrations, such as sodium hydroxide and ammonia, and against low to medium concentration acids, such as hydrochloric acid.
Seams	Double welded.
Hood	Drawstring hood with chin flap for added protection.
Sleeves/Gloves & Attachments	Open sleeves with hook-and-loop straps, or fitted with AlphaTec® #08-354 gloves (see model description above). If fitted, gloves are attached with a Bayonet glove ring system, which offers quick and simple glove exchange.
Legs/Footwear & Attachments	Open legs with elastic (Model 111), or attached PVC safety boots (Model 122), see model description above.
Zipper	Nylon zipper, or watertight PVC zipper (see model description above). The zipper is protected by a double splash guard/flap with press studs.
Colour	Red
Sizes	XXS - XXXL
Included with each delivery	• 2 pcs extra locking pins for the Bayonet glove ring system (if fitted) • 1 pce Molycote lubrication for the O-rings in the Bayonet glove ring system (if fitted) • 1 pce grease stick for lubrication of the zipper (only for suits fitted with watertight zipper)
Standards & Approvals	• EN 14605:2005 + A1:2009 type 4 (spray-tight) • EN 14126:2003 (infective agent protection) • EN 1149-5:2008 (antistatic suit material)

For additional information, visit us at protective.ansell.com or contact us at:

Ansell Protective Solutions AB
Arenagatan 8B
215 33 Malmö
Sweden
Tel. + 46 10 205 1800
order.protective@ansell.com

North America
Ansell Healthcare LLC
111 Wood Avenue South, Suite 210
Iselin, NJ 08830, USA
Tel. + 1 800 800 0444
Fax. + 1 800 800 0445
info@ansell.com

Europe, Middle East and Africa
Ansell Healthcare Europe NV
Riverside Business Park
Blvd International, 55
1070 Brussels, Belgium
Tel. + 32 2 528 74 00
Fax + 32 2 528 74 01
info.europe@ansell.com

Asia Pacific
Ansell Protective Solutions Singapore Pte. Ltd.
237, Pandan Loop,
#05-05 Westech Building
128424 Singapore
Tel. + 65 6908 4115
order.protective@ansell.com

Latin America & Caribbean
Ansell Brazil Ltda.
Rua das Figueiras 474 – 4º Andar
Bairro Jardim
SP 09080-300 Santo André, Brazil
CNPJ: 03.496.778/0001-21
+55 11 3356 3100
sac@ansell.com

Performance Standards



TYPE 4



EN 14126



EN 1149-5

EN 1149-5:
This applies
only to the
suit material.